

Sanitary Sight Gauge – Tri-Clamp



Model 6260

Model Body Material
6260 316 Stainless Steel

Compact sanitary construction. Designed to provide quick disassembly.

Complies with Construction Criteria of Grade A Pasturized Milk Ordinance.

Optional Seal materials include Silicone, EPDM, and Viton

Features


- ◆ Sizes 1/2" to 4" Tri-Clamp
- ◆ Crevice Free
- ◆ Meets 3A Standards
- ◆ CIP, SIP, COP
- ◆ Mechanical Finish–180 Grit

Ratings

- ◆ 100 psi @ 250°F
- ◆ 150 psi @ 70°F
- ◆ Vacuum: 29 Inches Hg.

Materials

- ◆ Glass: Borosilicate
Polysulfone (Optional)
- ◆ Seals: Buna

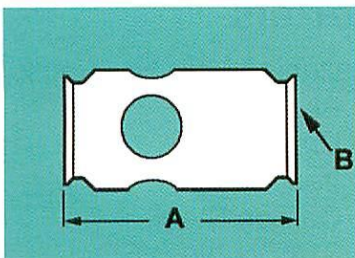

Unit Size	Dimensions in Inches	
	A	B
1/2	C/F	.50
3/4	C/F	.75
1	C/F	1.00
1-1/2	3.475	1.50
2	3.645	2.00
2-1/2	3.645	2.50
3	3.645	
4	3.625	4.00

C/F means consult factory.

Flanged Teflon Sight Gauge



Model 6270

Model End Material
6270 304 Stainless Steel Uncaged
6280 304 Stainless Steel Caged

150 lb Flanges are standard. 300 lb Flanges available. Flanges also available in Carbon Steel and 316 Stainless Steel.

Sturdy, favorable in high stress applications. Smooth, non-stick surface cleans easily.

High and low temperature rated.

Not vacuum rated.

Features

- ◆ Sizes 1/2" to 4" Flanged
- ◆ Translucent Teflon
- ◆ Flare Thru Ends
- ◆ Crevice Free
- ◆ Meets 3A Standards
- ◆ Up to 20 Feet Long
- ◆ Will Not Discolor
- ◆ UV and Sunlight Resistant
- ◆ Sanitary Connections Available
- ◆ No Flow Restriction
- ◆ No Entrapment Areas

Ratings

- ◆ See Table (Ratings at Ambient)
73 psi @ 248°F Max

Materials (Wetted)

- ◆ Translucent Teflon (FEP)



Model 6280

Unit Size	PSI @ Amb.	Min Burst PSI @ 68°F
1/2	200	600
3/4	200	600
1	150	450
1-1/2	150	450
2	150	450
2-1/2	150	450
3	100	300
4	100	300