

## Low Pressure – Single Window - Threaded



Rotator

**Rotator** – Paddlewheel indicator used for clear media to enhance flow indication. Any direction. The glass is held in place by a snap ring.

**Model Body Material**

118P Bronze

### Features

- ◆ Economical
- ◆ Sizes 1/4" to 2" NPT
- ◆ Single Window

### Ratings

- ◆ 125 psi @ 200°F

### Materials (Wetted)

- ◆ Glass: Temp Soda Lime
- ◆ Seals: Buna N
- ◆ Rotator: ABS Plastic

Note: Not applicable for steam service. See page 4 and 5

## Low Pressure – Double Window - Threaded



Plain

**Plain** – No indicator. For direct visual inspection of liquid. Mounts in any direction. The glass is held in place by an internal snap ring.

**Model Body Material**

137P Bronze

### Features

- ◆ Economical
- ◆ Sizes 1/4" to 2" NPT
- ◆ Double Window

### Ratings

- ◆ 125 psi @ 200°F

### Materials (Wetted)

- ◆ Glass: Temp Soda Lime
- ◆ Seals: Buna N
- ◆ Rotator: ABS Plastic



Rotator



**Rotator** – Paddlewheel indicator used for clear media to enhance flow indication. Any direction. The glass is held in place by an internal snap ring.

**Model Body Material**

138P Bronze

Note: Not applicable for steam service. See page 4 and 5.

Dimensions for Model 118P, 137P, 138P

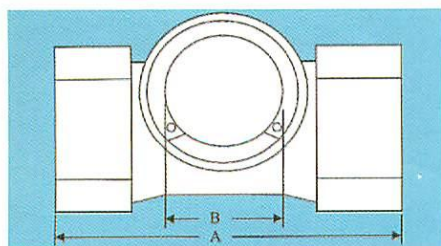

Unit Size	Dimensions in Inches & (cm)			
	A	B	C	Wt.lbs
1/8, 1/4 3/8	3-3/16 (8.1)	1-3/4 (4.5)	2-1/8 (5.4)	2
1/2 3/4	3-3/4 (9.5)	2 (5.1)	2-3/8 (6.0)	2
1, 1-1/4	4-3/8 (11.1)	2 (5.1)	2-7/8 (7.3)	4
1-1/2 2	4-1/2 (11.4)	2 (5.1)	3-3/4 (9.5)	6